


TYPE 15D AND TYPE 21D
ELEVATION A

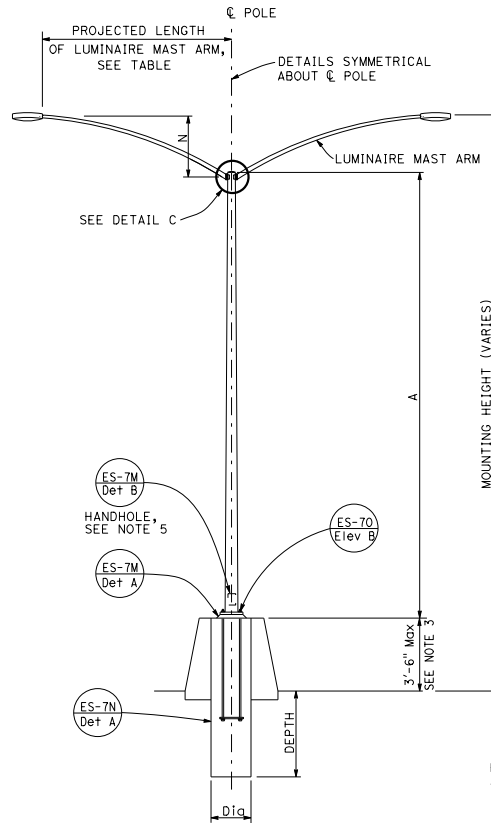


TYPE 15D AND TYPE 21D
MEDIAN BARRIER MOUNTED
ELEVATION B

POLE TYPE	POLE DATA				BASE PLATE DATA				CIDH PILE FOUNDATION	
	A HEIGHT	Min OD	Min	THICKNESS	C	BC = BOLT CIRCLE	THICKNESS	ANCHOR BOLT SIZE	Di	DEPTH
15D	30'-0"	8"	TOP	0.1793"	1'-0"	1'-0"	1 1/2"	1 1/4" ϕ x 42"	2'-6"	7'-0"
21D	35'-0"	8 5/8"	3 1/2"							


LUMINAIRE MAST ARM DATA					
PROJECTED LENGTH	N RISE	Min OD AT POLE	NOMINAL THICKNESS	TYPE 15D	TYPE 21D
6'-0"	2'-0" \pm	3 3/4"	0.1196"	31'-6" \pm	36'-6" \pm
8'-0"	2'-6" \pm	3 1/2"		32'-0" \pm	37'-0" \pm
10'-0"	3'-3" \pm	3 1/2"		32'-9" \pm	37'-9" \pm
12'-0"	4'-3" \pm	3 1/2"		33'-9" \pm	38'-9" \pm

NOTES:


1. Indicates mast arm length to be used unless otherwise noted on the plans.
2. For additional notes and details, see Standard Plans ES-7M and ES-7N.
3. See Concrete Barrier Details Type 60MF and 60MSF.
4. For locations with one arm, plug unused cap screw holes and chased outlet with galvanized cap screws and knockout plug.
5. Handhole shall be located perpendicular to the luminaire mast arm and as directed by the Engineer.

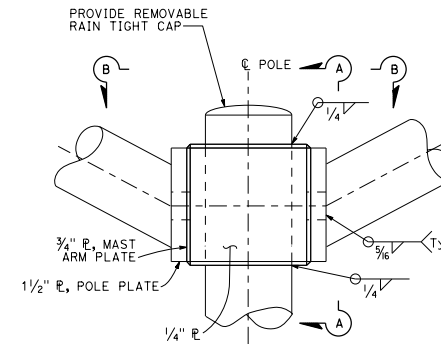


DETAIL C

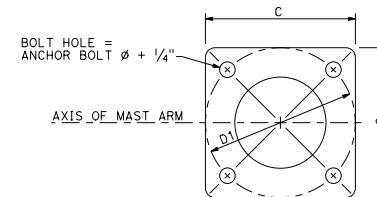

BASE PLATE
DETAIL B

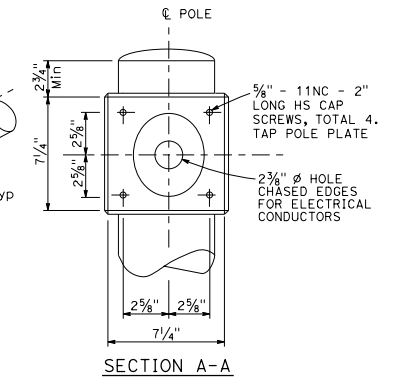

SECTION A-A

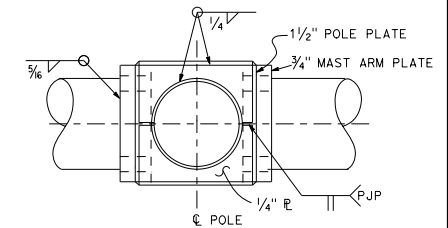

SECTION B-B

STATE OF CALIFORNIA
DEPARTMENT OF TRANSPORTATION
ELECTRICAL SYSTEMS
(LIGHTING STANDARD,
TYPES 15D AND 21D,
DOUBLE LUMINAIRE MAST ARM)
NO SCALE

ES-6D

DIST	COUNTY	ROUTE	POST MILES	SHEET TOTAL

REGISTERED CIVIL ENGINEER
Stanley P. Johnson
No. C51793
Exp. 3-31-20
CIVIL
STATE OF CALIFORNIA

May 31, 2018
PLANS APPROVAL DATE
THE STATE OF CALIFORNIA OR ITS OFFICERS
OR AGENTS SHALL NOT BE RESPONSIBLE FOR
THE ACCURACY OR COMPLETENESS OF SCANNED
COPIES OF THIS PLAN SHEET.